








[www.nikken-world.com](http://www.nikken-world.com)

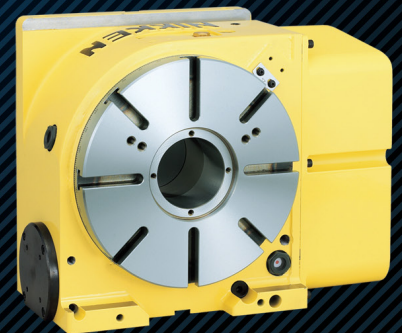

**Nikken Rotary Tables**  
*for Fanuc Robodrill α-iF Series*

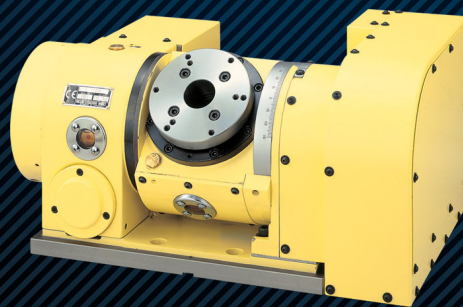

Fanuc Robodrill		Nikken Rotary Table	
		4th Axis	5th Axis
	α-T14iFs/T14iFse α-T21iFs/T21iFse	CNCZ105LFA CNCZ180LFA CNCZ202LFA CNCZ260LFA	5AX-130FA
	α-T14iF/T14iFe α-T21iF/T21iFe	CNCZ105LFA CNCZ180LFA CNCZ202LFA CNCZ260LFA	5AX-130FA
	α-T14iFL/T14iFLe α-T21iFL/T21iFLe	CNCZ105LFA CNCZ180LFA CNCZ202LFA CNCZ260LFA	5AX-130FA 5AX-201FA

## CNCZ260 & CNCZ302

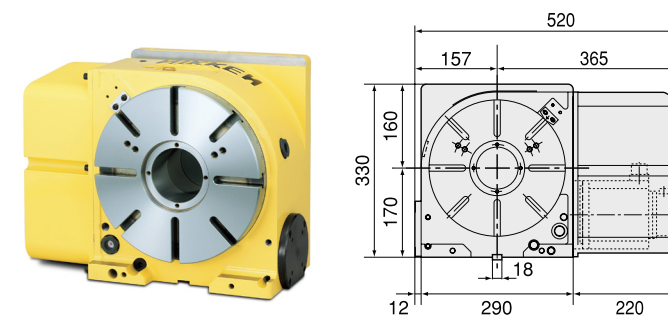


Table Model	Faceplate Dia. (mm)	Rotation Speed (rpm)	Clamp Torque (Nm)	Max. Load Supported (kg)
CNCZ260	ø260	33.3	588 / 1568	350
CNCZ302	ø300	33.3	588 / 1568	350

- Several options available for motor mounting position, including right side, left side, back and top
- Highest weight load capacity in its class

## 5AX-130

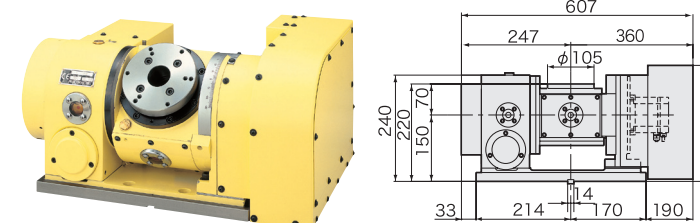


Table Model	Faceplate Dia. (mm)	Rotation Speed (rpm)	Clamp Torque (Nm)	Max. Vert. Load (kg)
5AX-130	ø105	22.2 Rotary 11.1 Tilting	205 Rotary 303 Tilting	25 (0°-30°) 15 (30°-90°)

- Excellent full 5 axis contouring capabilities
- Compact design

## CNCZ105

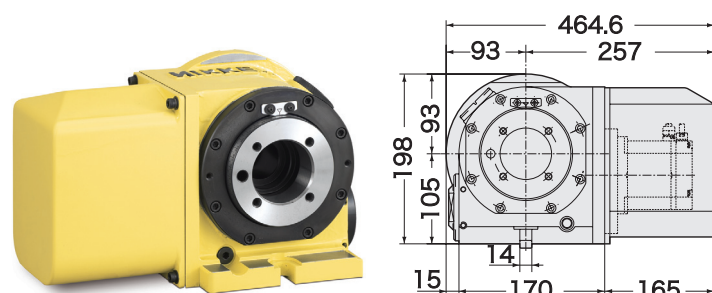


Table Model	Faceplate Dia. (mm)	Rotation Speed (rpm)	Clamp Torque (Nm)	Max. Load Supported (kg)
CNCZ105	ø105	44.4	205	60

- Compact design
- Suitable for a wide range of applications from small machines with simple indexing to full CNC integration for production application

## 5AX-201

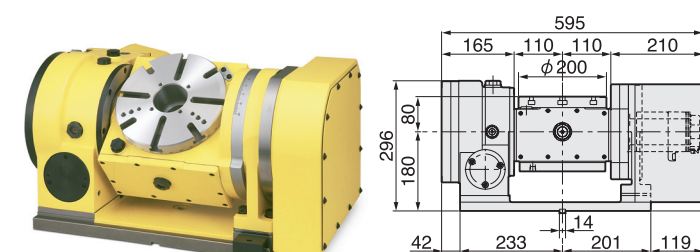


Table Model	Faceplate Dia. (mm)	Rotation Speed (rpm)	Clamp Torque (Nm)	Max. Vert. Load (kg)
5AX-201	ø200	22.2 Rotary 16.6 Tilting	588 Rotary 612 Tilting	80 (0°-30°) 50 (30°-90°)

- Excellent full 5 axis contouring capabilities
- Compact design

## CNCZ180 & CNCZ202

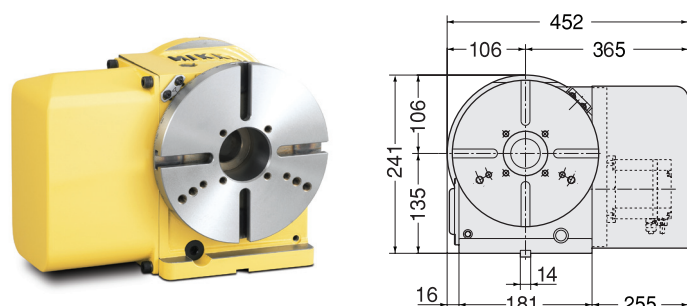


Table Model	Faceplate Dia. (mm)	Rotation Speed (rpm)	Clamp Torque (Nm)	Max. Load Supported (kg)
CNCZ180	ø180	44.4	303	200
CNCZ202	ø200	44.4	303	200

- Suitable for a wide range of applications from small machines with simple indexing to full CNC integration for production application

## 5AX-2MT-105


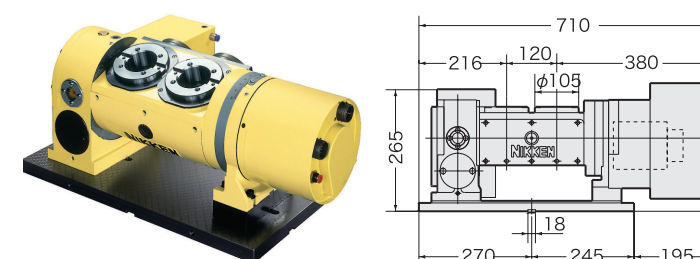



Table Model	Faceplate Dia. (mm)	Rotation Speed (rpm)	Clamp Torque (Nm)	Max. Vert. Load (kg)
5AX-2MT	ø105	22.2 Rotary 11.1 Tilting	147 Rotary 147 Tilting	15 (0°-30°) 10 (30°-90°)

- Offer increased versatility for machine tools
- For higher productivity, option for multiple set-ups on a single spindle machine


$\alpha$ -T14iFs /  $\alpha$ -T14iFse /  $\alpha$ -T21iFs /  $\alpha$ -T21iFse with **CNCZ105LFA**

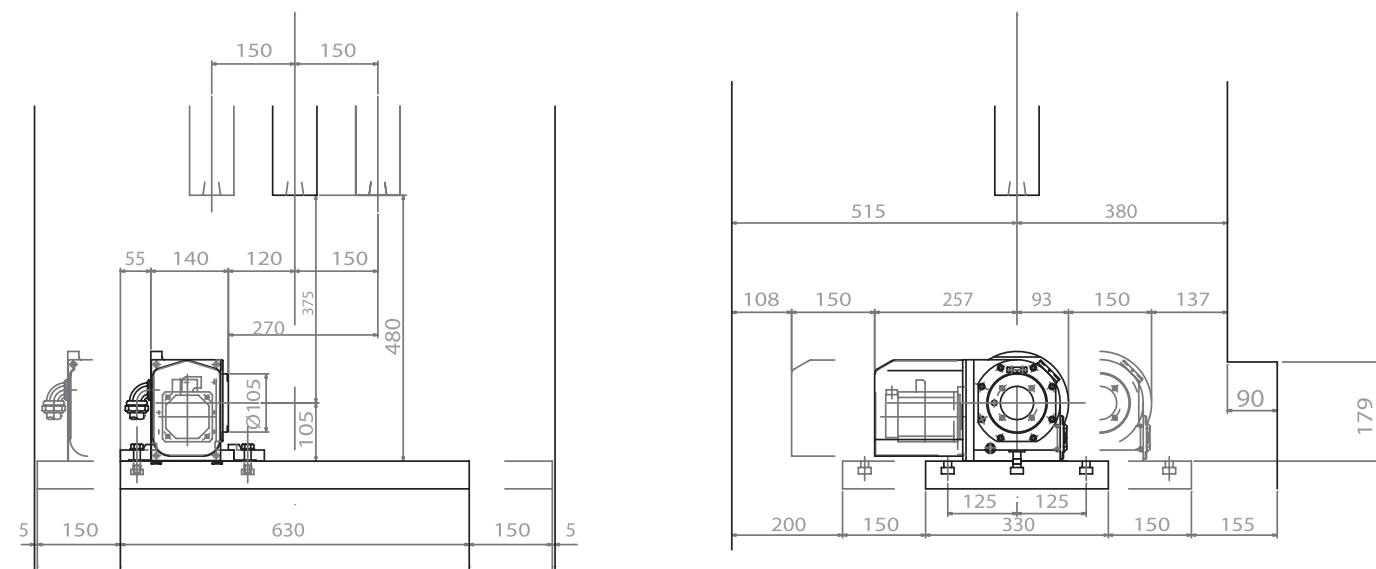


$\alpha$ -T14iF/ $\alpha$ -T14iFe/ $\alpha$ -T21iF/ $\alpha$ -T21iFe with **CNC260LFA**

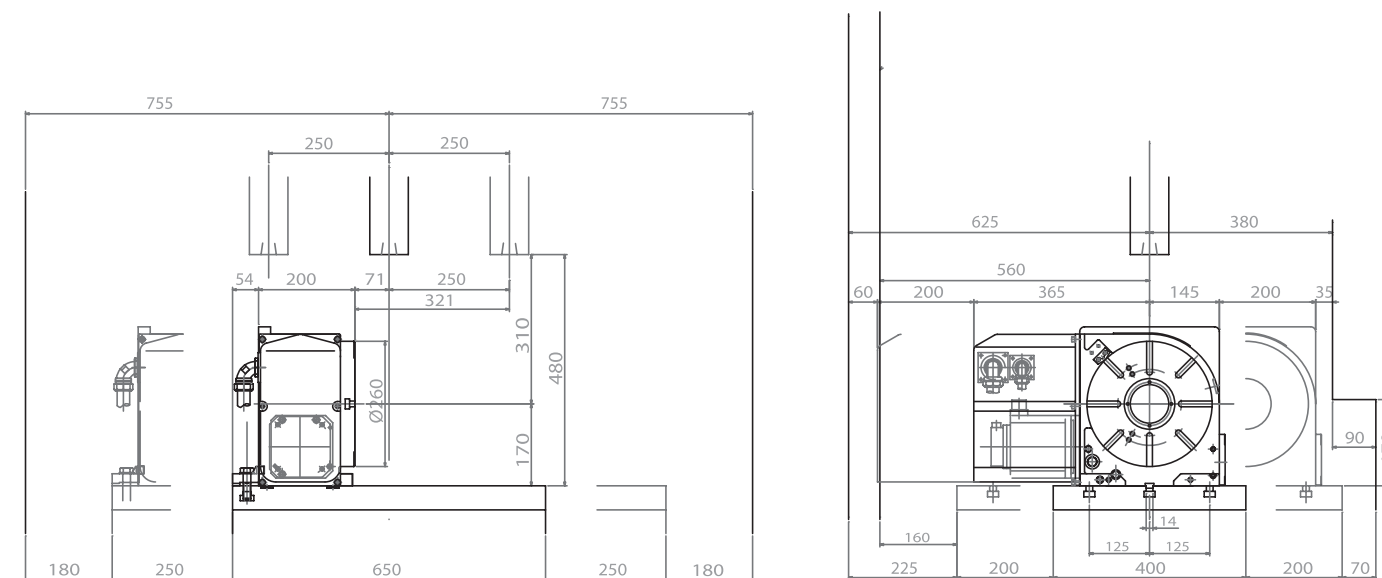

$\alpha$ -T14iFL/ $\alpha$ -T14iFLe/ $\alpha$ -T21iFL/ $\alpha$ -T21iFLe with **5AX-201FA**

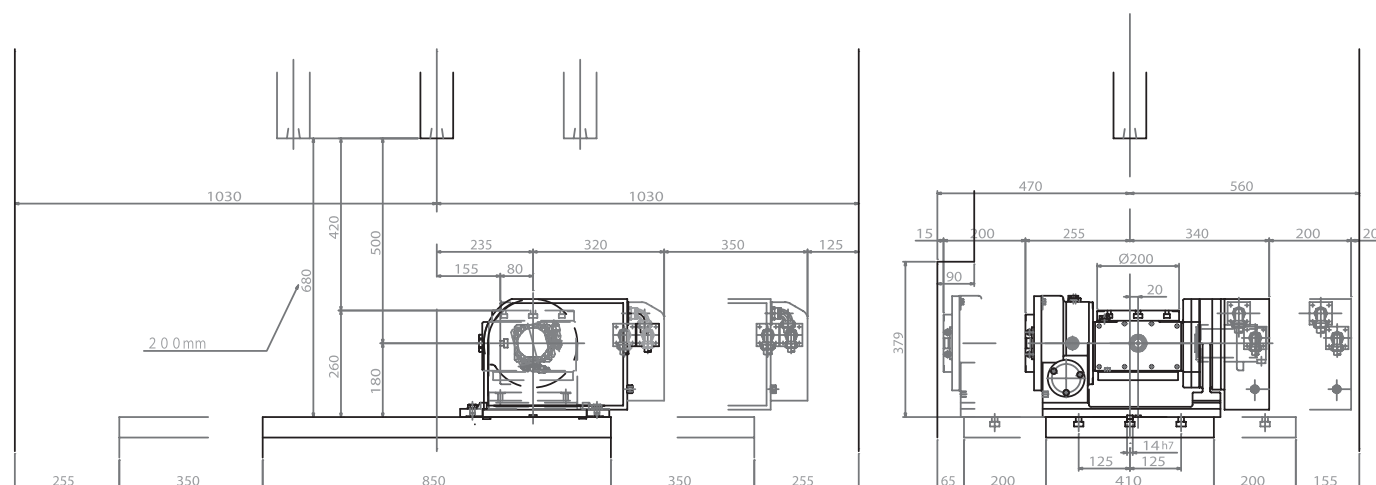

$\alpha$ -T14iF/ $\alpha$ -T14iFe/ $\alpha$ -T21iF/ $\alpha$ -T21iFe with **5AX-130FA**

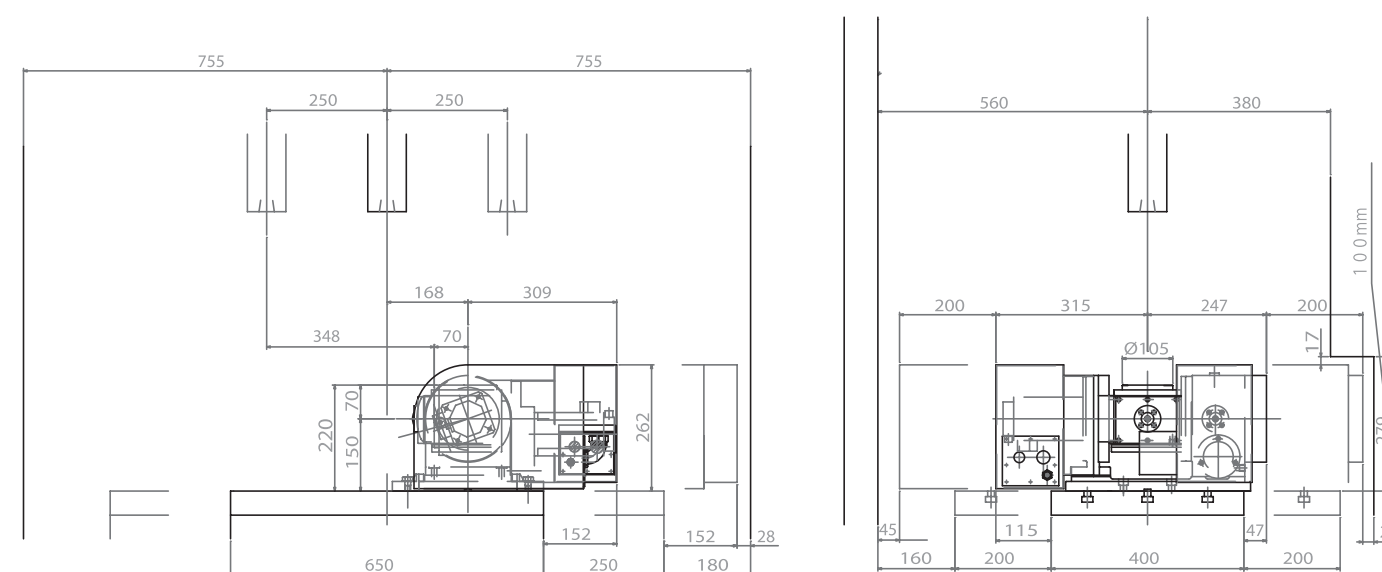



[www.nikken-world.com](http://www.nikken-world.com)

## The Perfect Solution for Your Manufacturing Needs

Nikken's Rotary Tables are known worldwide for their longevity, rigidity and quality.

Our range of rotary tables are designed and built to provide extreme accuracy and to increase your work productivity.

Fanuc Robodrill is an intelligent high-speed CNC drill with versatility which offers application solutions to meet a wide variety of machining needs.

Nikken's Rotary Tables seamlessly become part of the machine to create the perfect solution for each and every manufacturing requirement.

**The result is simple:** maximum productivity and unrivalled efficiency.